


# EUROTYPE TRACK SYSTEM

H  
I  
G  
H  
P  
O  
W  
E  
R  
S  
E  
R  
I  
E  
S



**RECESSED TRACK**

- 2092 Length: 2m
- 2093 Length: 3m
- 2094 Length: 4m




Binario 3 circuiti in alluminio estruso. Voltaggio 220-240V. Il cablaggio elettrico è localizzato in una carcassa in PVC estruso isolato. Il binario ha a disposizione una serie di accessori che potranno risolvere con successo ogni tipo di installazione illuminotecnica.

3-circuit main voltage track in extruded aluminium. Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing. The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements.

## REFERENCE DIAGRAM FOR CHOICE OF CONNECTORS

RECESSED TRACK

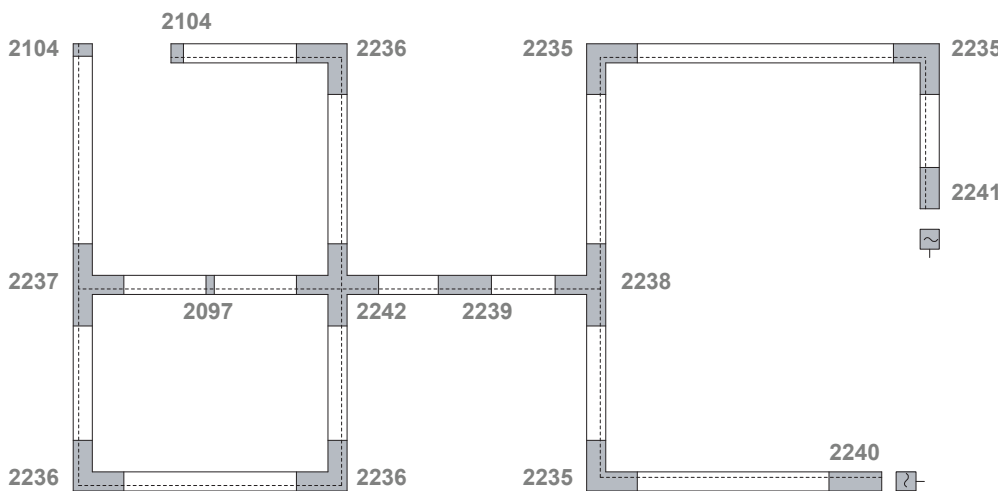

The drawing is reflected ceiling view

Directive Lug on the back of connectors

Recessed Couplings




**Feeder**  
2240 Right feeder for power  
2241 Left feeder for power




**Concealed Connector**  
2097




**L Connector**  
2235 Right L connector  
2236 Left L connector




**T Connector**  
2237 Right T connector  
2238 Left T connector



**X Connector**  
2242




**End Cap**  
2104




**Straight Connector**  
2239

Installation Components



**Mechanical Coupler**  
2105



**Wire Hanger**  
2108

