


EUROTYPE TRACK SYSTEM



STANDARD TRACK

- 2089** Length: 1m
- 2090** Length: 2m
- 2091** Length: 3m




Binario 3 circuiti in alluminio estruso. Voltaggio 220-240V. Il cablaggio elettrico è localizzato in una carcassa in PVC estruso isolato. Il binario ha a disposizione una serie di accessori che potranno risolvere con successo ogni tipo di installazione illuminotecnica. E' dotato di fissaggio a superficie ogni 500 m.

3-circuit main voltage track in extruded aluminium. Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing. The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements. And also has the facility for direct surface mounting through knockouts at 500 m spacing.

REFERENCE DIAGRAM FOR CHOICE OF CONNECTORS

STANDARD TRACK

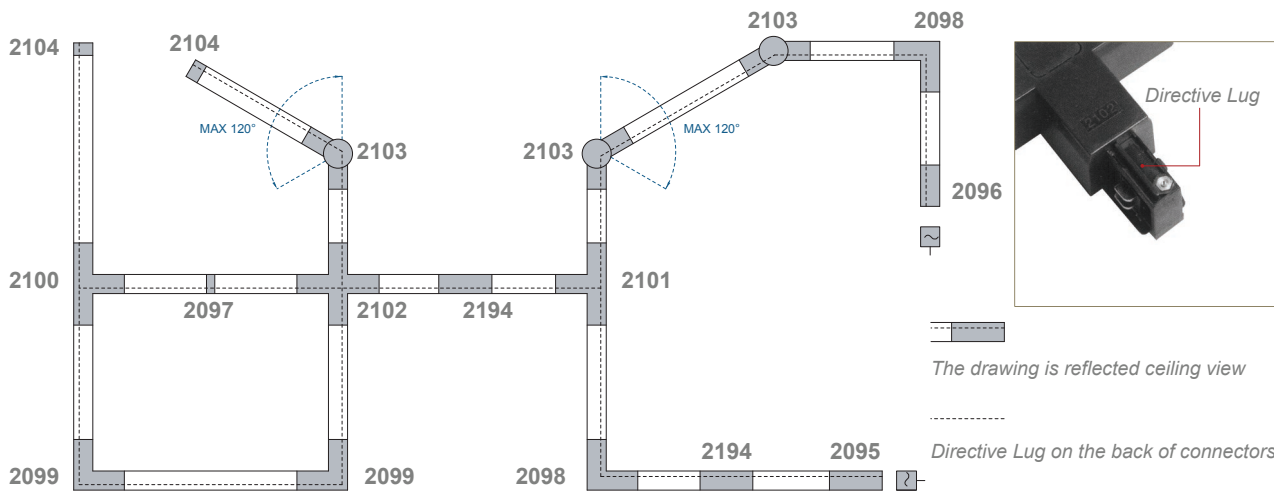

Standard Couplings

| | |
|--|--|
| | Feeder 2095 Right feeder for power 2096 Left feeder for power |
| | Concealed Connector 2097 |
| | L Connector 2098 Right L connector 2099 Left L connector |
| | T Connector 2100 Right T connector 2101 Left T connector |

Installation Components

| | | | |
|--|--|--|--|
| | X Connector 2102 | | Mechanical Coupler 2105 |
| | Flexible Connector 2103 | | Ceiling Bracket 2106 |
| | End Cap 2104 | | Wire Hanger 2108 |
| | Straight Connector 2194 | | |